

Accessories


Scale

All bypass level indicators can be supplied for applications up to 150 °C with a glued-on scale mounted directly next to the indicator slide. This scale will be manufactured according to the customer's requirements. So any graduation or measuring unit is possible.

The base material is aluminium.

We need the following data to submit an offer:

- ▶ Unit of measurement
- ▶ Scale start and end values
- ▶ LM (indication length)
- ▶ Graduation: centimeter, decimeter or inch

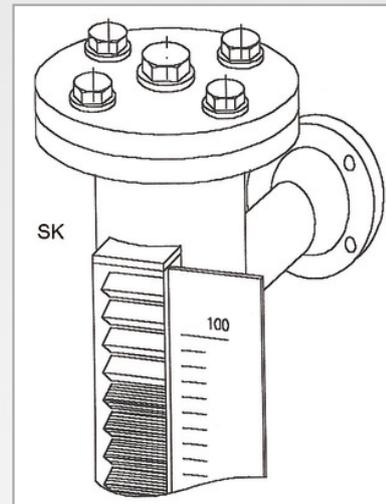

Isolation and protection for indication rail ("MA" and "AL")

PO:

For outdoor applications or applications in which the bypass level indicator is exposed to cold, splash water or dust we recommend the use of our protective poliolefine tubing for the indication rail.

Temperature range: -55...105 °C.

Test and certificates

- ▶ Pressure test with certificates
- ▶ Factory certificates according to DIN EN 10204-2.1, DIN EN 10204-2.2, DIN EN 10204-3.1